

Docket No. LS/0003.01

Please type a plus sign (+) inside this box → ☐PTO/SB/05 (12/97)
Approved for use through 09/30/00 OMB 0651-0032
Patent and Trademark Office, U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.**UTILITY
PATENT APPLICATION
TRANSMITTAL**

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No. LS/0003.01

Total Pages 41

First Named Inventor or Application Identifier

Kirani

Express Mail Label No. EK191088360US

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO:Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

1. ☐ Fee Transmittal Form
(Submit an original, and a duplicate for fee processing)
2. ☒ Specification [Total Pages 32]
(preferred arrangement set forth below)
- Descriptive title of the invention
 - Cross References to Related Applications
 - Statement Regarding Fed sponsored R & D
 - Reference to Microfiche Appendix
 - Background of the invention
 - Brief Summary of the invention
 - Brief Description of the Drawings (if filed)
 - Detailed Description
 - Claim(s)
 - Abstract of the Disclosure
3. ☒ Drawing(s) (35 USC 113) [Total Sheets 9]
4. Oath or Declaration [Total Pages 0]
- a. ☐ Newly executed (original or copy)
 - b. ☐ Copy from a prior application (37 CFR 1.63(d))
(for continuation/divisional with Box 17 completed)
[Note Box 5 below]
 - i. ☐ **DELETION OF INVENTOR(S)**
Signed statement attached deleting
inventor(s) named in the prior application,
see 37 CFR 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference (useable if Box 4b is checked)
The entire disclosure of the prior application, from which a
copy of the oath or declaration is supplied under Box 4b,
is considered as being part of the disclosure of the
accompanying application and is hereby incorporated by
reference therein.

6. ☐ Microfiche Computer Program (Appendix)
7. Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)
- a. ☐ Computer Readable Copy
 - b. ☐ Paper Copy (identical to computer copy)
 - c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

8. ☐ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(b) Statement ☐ Power of Attorney
(when there is an assignee)
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
14. ☒ Small Entity ☐ Statement filed in prior application,
Statement(s) Status still proper and desired
15. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)
16. ☒ Other: Express Mail Certificate

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: _____**18. CORRESPONDENCE ADDRESS**☐ Customer Number or Bar Code Labelor ☒ Correspondence address below

(Insert Customer No. or Attach bar code label here)

NAME	John A. Smart				
ADDRESS	708 Blossom Hill Rd., #201				
CITY	Los Gatos	STATE	CA	ZIP CODE	95032
COUNTRY	U.S.A.	TELEPHONE	(408) 395-8819	FAX	(408) 490-2853

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

Certificate under 37 CFR 1.10 of Mailing by "Express Mail"


EK191088360US

"Express Mail" label number

June 6, 2000

Date of Deposit

I hereby certify that this correspondence is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231.

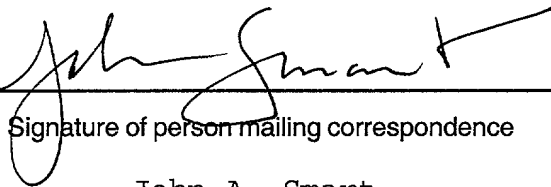

Signature of person mailing correspondence

John A. Smart

Typed or printed name of person mailing correspondence

Note: Each paper must have its own certificate of mailing by "Express Mail".

JC828 U.S. PTO

09/588875



06/06/00

Docket No. LS/0003.01

PTO/SB/10 (12-97)
 Approved for use through 9/30/00. OMB 0651-0031
 Patent and Trademark Office, U.S. DEPARTMENT OF COMMERCE
 Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

**STATEMENT CLAIMING SMALL ENTITY STATUS
 (37 CFR 1.9(f) & 1.27(c))--SMALL BUSINESS CONCERN**

Docket Number (Optional)
LS/0003.01

Applicant, Patentee, or Identifier: Shekhar Kirani et al.

Application or Patent No.: _____

Filed or Issued: _____

Title: System and Methodology Providing Access to Photographic Images and
 Attributes for Multiple Disparate Client Devices

I hereby state that I am

- ☐ the owner of the small business concern identified below:
☒ an official of the small business concern empowered to act on behalf of the concern identified below:

NAME OF SMALL BUSINESS CONCERN LightSurf Technologies, Inc.

ADDRESS OF SMALL BUSINESS CONCERN _____

110 Cooper Street, 4th Floor, Santa Cruz, CA 95060

I hereby state that the above identified small business concern qualifies as a small business concern as defined in 13 CFR Part 121 for purposes of paying reduced fees to the United States Patent and Trademark Office, in that the number of employees of the concern, including those of its affiliates, does not exceed 500 persons. For purposes of this statement, (1) the number of employees of the business concern is the average over the previous fiscal year of the concern of the persons employed on a full-time, part-time, or temporary basis during each of the pay periods of the fiscal year, and (2) concerns are affiliates of each other when either, directly or indirectly, one concern controls or has the power to control the other, or a third party or parties controls or has the power to control both.

I hereby state that rights under contract or law have been conveyed to and remain with the small business concern identified above with regard to the invention described in:

- ☒ the specification filed herewith with title as listed above.
☐ the application identified above.
☐ the patent identified above.

If the rights held by the above identified small business concern are not exclusive, each individual, concern, or organization having rights in the invention must file separate statements as to their status as small entities, and no rights to the invention are held by any person, other than the inventor, who would not qualify as an independent inventor under 37 CFR 1.9(c) if that person made the invention, or by any concern which would not qualify as a small business concern under 37 CFR 1.9(d), or a nonprofit organization under 37 CFR 1.9(e).

Each person, concern, or organization having any rights in the invention is listed below:

- ☒ no such person, concern, or organization exists.
☐ each such person, concern, or organization is listed below.

Separate statements are required from each named person, concern or organization having rights to the invention stating their status as small entities. (37 CFR 1.27)

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b))

NAME OF PERSON SIGNING Norman Cheung

TITLE OF PERSON IF OTHER THAN OWNER Chief Financial Officer

ADDRESS OF PERSON SIGNING 110 Cooper Street, 4th Floor, Santa Cruz, CA 95060

SIGNATURE  DATE 06/06/2000

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

PATENT APPLICATION

SYSTEM AND METHODOLOGY PROVIDING ACCESS TO PHOTOGRAPHIC IMAGES AND ATTRIBUTES FOR MULTIPLE DISPARATE CLIENT DEVICES

Inventors: SHEKHAR KIRANI, a citizen of India residing in Capitola, CA; and
VENKAT V. EASWAR, a citizen of India residing in Cupertino, CA.

Assignee: LightSurf Technologies, Inc.

John A. Smart
Reg. No. 34,929

708 Blossom Hill Rd., #201
Los Gatos, CA 95032
(408) 395-8819; (408) 490-2853 FAX

SYSTEM AND METHODOLOGY PROVIDING ACCESS TO PHOTOGRAPHIC
IMAGES AND ATTRIBUTES FOR MULTIPLE DISPARATE CLIENT DEVICES

RELATED APPLICATIONS

The present application is related to and claims the benefit of priority from commonly-owned U.S. provisional application serial no. 60/203,507, filed May 11, 2000, entitled SYSTEM AND METHODOLOGY PROVIDING ACCESS TO PHOTOGRAPHIC IMAGES AND ATTRIBUTES FOR MULTIPLE DISPARATE CLIENT DEVICES, the disclosure of which (including any attachments and appendices thereof) is hereby incorporated by reference.

COPYRIGHT NOTICE

A portion of the disclosure of this patent document contains material which is subject to copyright protection. The copyright owner has no objection to the facsimile reproduction by anyone of the patent document or the patent disclosure as it appears in the Patent and Trademark Office patent file or records, but otherwise reserves all copyright rights whatsoever.

BACKGROUND OF THE INVENTION

The present invention relates to the field of photography and, more particularly, to online system and methodology for improving online access to digital photographic images and information about those images.

Today, digital imaging, particularly in the form of digital cameras, is a prevalent reality that affords a new way to capture photos using a solid-state image sensor instead of traditional film. A digital camera functions by recording incoming light on some sort of sensing mechanisms and then processes that information (basically, through analog-to-digital conversion) to create a memory image of the target picture. A digital camera's biggest advantage is that it creates images digitally thus making it easy to transfer images between all kinds of devices and applications. For instance, one can easily insert digital images into word processing documents, send them by e-mail to friends, or post them

on a Web site where anyone in the world can see them. Additionally, one can use photo-editing software to manipulate digital images to improve or alter them. For example, one can crop them, remove red-eye, change colors or contrast, and even add and delete elements. Digital cameras also provide immediate access to one's images, thus avoiding the hassle and delay of film processing. All told, digital photography is becoming increasingly popular because of the flexibility it gives the user when he or she wants to use or distribute an image.

In order to generate an image of quality that is roughly comparable to a conventional photograph, a substantial amount of information must be captured and processed. For example, a low-resolution 640 x 480 image has 307,200 pixels. If each pixel uses 24 bits (3 bytes) for true color, a single image takes up about a megabyte of storage space. As the resolution increases, so does the image's file size. At a resolution of 1024 x 768, each 24-bit picture takes up 2.5 megabytes. Because of the large size of this information, digital cameras usually do not store a picture in its raw digital format but, instead, apply compression technique to the image so that it can be stored in a standard compressed image format, such as JPEG (Joint Photographic Experts Group). Compressing images allows the user to save more images on the camera's "digital film," such as flash memory (available in a variety of specific formats) or other facsimile of film. It also allows the user to download and display those images more quickly.

A variety of digital image products are currently available to consumers. Regardless of how images are recorded digitally, at some later point in time, the image information must become available to other devices -- that is, become available to a larger network of digital devices, so that the images may be outputted (e.g., printed to hard copy) or shared with other people. Today, Web sites exist on the Internet with server computers having the capability to organize and display photographs. In a complementary manner, a multitude of different client devices exist with sufficient graphics capabilities for potentially viewing those photographs. For instance, such client devices range from desktop computers running Web browser software to handheld devices (e.g., running under Palm or Windows

CE), all connected to the Internet over TCP/IP, each with the capability of displaying information.

A newer class of devices is now coming to the market, one with wireless data capabilities as well as substantial display capabilities. These devices connect to the Internet typically over WAP (Wireless Application Protocol). WAP is a communication protocol, not unlike TCP/IP, that was developed by a consortium of wireless companies, including Motorola, Ericsson, and Nokia, for transmitting data over wireless networks. For a description of WAP, see e.g., Mann, S., *The Wireless Application Protocol*, Dr. Dobb's Journal, pp. 56-66, October 1999, the disclosure of which is hereby incorporated by reference. More particularly, WAP includes various equivalents of existing Internet protocols. For instance, WML is a WAP version of the HTML protocol. Other examples include a WAP browser that is a WAP equivalent of an HTML browser and a WAP gateway (on the server side) that is a WAP equivalent of an HTTP server. At the WAP gateway, HTTP is translated to/from WAP.

All told, a plethora of graphics-equipped devices exist today that may be connected to the Internet, through both wireless (e.g., 9600 baud) and wireline connections (e.g., 56k baud, DSL, and cable modem). These devices are capable of displaying graphics, including digital photographic images. However, a fundamental problem exists with current approaches to displaying images residing on the Internet on all of these devices. The personal photographs of users that reside on the Internet currently are accessible from only one class of devices, the HTML browsers. At the same time, other classes of devices, such as described above, include not only the ability to connect to the Internet but also the ability to render complex graphics. Still, these devices are not able to display user photographs on the Internet since these devices support formats and communication transport protocols that are very different from those used by HTML browsers.

Consider, for instance, the example of a Palm™ handheld device. Suppose a user has a "true-color" (e.g., 32-bit depth) 1024 by 768 digital photograph of his or her family on the Web. If the user connects to the Internet using the Palm device, the user still cannot display the photograph. For instance, the Palm device may only support four-level or

sixteen-level grayscale. Even if the image could be displayed, the transmission time for downloading the image to the Palm device would be impractical. Still further, even if the image could be downloaded, the display for the Palm may be physically too small to render the image in a manner that is acceptable to the user.

This problem is not limited to just image data but also applies to attribute information for the image. Suppose, for instance, that a user has a collection of photos on the Internet (i.e., online photo album). However, in addition to not being able to view the image, the user is not able to download attribute information to most devices either. Information such as image title, description, and so forth, are simply not available to most devices. This problem stems from the limited bandwidth available to wireless devices, as well as the inability of present-day Internet photographic servers to understand the capabilities of a particular device that is currently connected. Thus, this problem may be summarized as follows. First, present-day devices are not able to tell the server very well what their capabilities are. Second, even if such devices could clearly indicate their capabilities, present-day servers are not designed to act on that information to limit transmitted information to just that which is meaningful for the client device. As more and more classes of network-connected devices come to market, including screen phones and smart set-top boxes, this problem can be expected to grow as each device has its own particular characteristics.

SUMMARY OF THE INVENTION

A Photographic Server ("PhotoServer") System of the present invention implements a methodology for providing access to photographic images and attributes for multiple disparate client devices -- that is, to target devices of varying hardware and software capabilities. The system enables delivery of photographic images to any device with connectivity capability. The target devices may include both wireless devices (e.g., cellular phone, handheld PDA (personal data assistant), and pager) as well as wireline devices (e.g., desktop computer and videophone).

The PhotoServer includes the following modules: a Photographic Server (i.e., the core “photo server”), a User Data Manager, a Device Profile Manager, a Photo Translator, a Photo Cache, and a Photo Storage (module). The Photographic Server is responsible for serving up the photos based on the target device display capabilities. The display capabilities are communicated to the Photographic Server by the device or the person who owns/controls the device, or are surmised by the system. If the device is communicating its capabilities, it does so during the initiation or during every interaction; alternatively, its capabilities are hard-coded into the Photographic Server based on the prior knowledge of the device. The owner of the device can fine-tune the settings based on the actual settings of the device (such as resolution, preferred method of translation, and the like). The Photographic Server, which works independent of the available transport mechanisms (e.g., wireless or wireline), interacts with all the other modules to translate a requested photo into an appropriate target format.

The system implements a method for providing access to photographic images and attributes for multiple disparate client devices, which operates as follows. First, the method processes the received input request based on a user identifier (user ID) or a photograph identifier (photo ID) for the photos that are of interest. The photo ID is a unique identifier for a particular photograph that either (1) has been previously communicated to the target device (client), or (2) has been created by the target device (i.e., it is the target device's unique identifier), in the case where the target device is connecting for the first time. Next, the method constructs an information record describing the target device's capabilities. Information gathered from this step allows the PhotoServer system to understand exactly what capabilities it can support in the target device. In particular, this information indicates to the system what transformation (if any) is required for translating the original photo into a format suitable for the target device.

Now, the method is ready to check in the Photo Cache to see whether that cache already stores the photo of interest -- that is, stores a version of the photo that has been translated in a manner suitable for this particular target device. If the photo (translated for the target device) already exists in the Photo Cache, the method may simply return that to the

target device. However, if it is not in the cache, then the method proceeds to additional steps. First, the photo ID and the target device parameters are passed on to the Photo Translator. The task of the Photo Translator, at this point, is to transform the photo from its original format into the format that is desired for the target device (based on target device capabilities). Once the Photo Translator has carried out this task, the newly-transformed version of the photo is copied into the Photo Cache. This translated version of the photo is now returned to the target device, in a streaming fashion.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram illustrating a digital computer suitable for implementing distributed processing portions of the present invention.

Fig. 2 is a block diagram of a software system suitable for controlling the computer of Fig. 1.

Figs. 3A-B are block diagrams illustrating a Photographic Server environment, which includes a PhotoServer system of the present invention.

Fig. 3C is a block diagram illustrating storage of information in the system.

Figs. 4A-D are flowcharts illustrating methodology of the present invention for providing access to photographic images and attributes for multiple disparate client devices.

DETAILED DESCRIPTION OF A PREFERRED EMBODIMENT

The following description focuses on an embodiment of the present invention in an Internet-connected server environment, which is the currently-preferred embodiment. However, those skilled in the art will appreciate that the present invention may be embodied in other devices capable of storing, organizing, and/or otherwise processing digital images. Further, the description will focus on implementation of portions of the invention in an Internet-connected environment including desktop and server computers, such as an IBM-compatible computer running under Microsoft® Windows 2000. The present invention, however, is not limited to any particular one application or any particular environment.

Instead, those skilled in the art will find that the system and methods of the present invention may be advantageously embodied on a variety of different platforms, including Macintosh, Linux, BeOS, Solaris, UNIX, and the like. Therefore, the description of the exemplary embodiments which follows is for purposes of illustration and not limitation.

Basic supporting hardware and software

A. Basic computer hardware (e.g., for desktop and server computers)

Portions of the present invention may be implemented on a conventional or general-purpose computer system, such as an IBM-compatible personal computer (PC) or server computer. Fig. 1 is a very general block diagram of an IBM-compatible system 100. As shown, system 100 comprises a central processing unit(s) (CPU) 101 coupled to a random-access memory (RAM) 102, a read-only memory (ROM) 103, a keyboard 106, a pointing device 108, a display or video adapter 104 connected to a display device 105, a removable (mass) storage device 115 (e.g., floppy disk), a fixed (mass) storage device 116 (e.g., hard disk), a communication port(s) or interface(s) 110, a modem 112, and a network interface card (NIC) or controller 111 (e.g., Ethernet). Although not shown separately, a real-time system clock is included with the system 100, in a conventional manner.

CPU 101 comprises a processor of the Intel Pentium® family of microprocessors. However, any other suitable microprocessor or microcomputer may be utilized for implementing the present invention. The CPU 101 communicates with other components of the system via a bi-directional system bus (including any necessary input/output (I/O) controller circuitry and other “glue” logic). The bus, which includes address lines for addressing system memory, provides data transfer between and among the various components. Description of Pentium-class microprocessors and their instruction set, bus architecture, and control lines is available from Intel Corporation of Santa Clara, CA. Random-access memory 102 serves as the working memory for the CPU 101. In a typical configuration, RAM of sixteen megabytes or more is employed. More or less memory may be used without departing from the scope of the present invention. The read-only memory (ROM) 103 contains the basic input output system code (BIOS) -- a set of low-level routines

in the ROM that application programs and the operating systems can use to interact with the hardware, including reading characters from the keyboard, outputting characters to printers, and so forth.

Mass storage devices 115, 116 provide persistent storage on fixed and removable media, such as magnetic, optical or magnetic-optical storage systems, flash memory, or any other available mass storage technology. The mass storage may be shared on a network, or it may be a dedicated mass storage. As shown in Fig. 1, fixed storage 116 stores a body of program and data for directing operation of the computer system, including an operating system, user application programs, driver and other support files, as well as other data files of all sorts. Typically, the fixed storage 116 serves as the main hard disk for the system.

In basic operation, program logic (including that which implements methodology of the present invention described below) is loaded from the storage device or mass storage 116 into the main (RAM) memory 102, for execution by the CPU 101. During operation of the program logic, the system 100 accepts user input from a keyboard 106 and pointing device 108, as well as speech-based input from a voice recognition system (not shown). The keyboard 106 permits selection of application programs, entry of keyboard-based input or data, and selection and manipulation of individual data objects displayed on the display screen 105. Likewise, the pointing device 108, such as a mouse, track ball, pen device, or the like, permits selection and manipulation of objects on the display screen. In this manner, these input devices support manual user input for any process running on the system.

The computer system 100 displays text and/or graphic images and other data on the display device 105. Display device 105 is driven by the video adapter 104, which is interposed between the display 105 and the system. The video adapter 104, which includes video memory accessible to the CPU 101, provides circuitry that converts pixel data stored in the video memory to a raster signal suitable for use by a cathode ray tube (CRT) raster or liquid crystal display (LCD) monitor. A hard copy of the displayed information, or other information within the system 100, may be obtained from the printer 107, or other output

device. Printer 107 may include, for instance, an HP Laserjet® printer (available from Hewlett-Packard of Palo Alto, CA), for creating hard copy images of output of the system.

The system itself communicates with other devices (e.g., other computers) via the network interface card (NIC) 111 connected to a network (e.g., Ethernet network), and/or modem 112 (e.g., 56K baud, ISDN, DSL, or cable modem), examples of which are available from 3Com of Santa Clara, CA. The system 100 may also communicate with local occasionally-connected devices (e.g., serial cable-linked devices) via the communication (“comm”) interface 110, which may include a RS-232 serial port, a Universal Serial Bus (USB) interface, or the like. Devices that will be commonly connected locally to the interface 110 include laptop computers, handheld organizers, digital cameras, and the like.

IBM-compatible personal computers and server computers are available from a variety of vendors. Representative vendors include Dell Computers of Round Rock, TX, Compaq Computers of Houston, TX, and IBM of Armonk, NY. Other suitable computers include Apple-compatible computers (e.g., Macintosh), which are available from Apple Computer of Cupertino, CA, and Sun Solaris workstations, which are available from Sun Microsystems of Mountain View, CA.

The above-described system 100 is presented for purposes of illustrating the basic hardware underlying desktop (client) and server computer components that may be employed in the system of the present invention. For purposes of discussion, the following description will present examples in which it will be assumed that there exists a client machine (e.g., desktop “PC”) having application software locally that, in turn, is connected to a “server” or remote device having information and/or services of interest to the ultimate end-user. The present invention, however, is not limited to any particular environment or device configuration. In particular, a client/server distinction is neither necessary to the invention nor even necessarily desirable, but is used to provide a framework for discussion. Instead, the present invention may be implemented in any type of computer system or processing environment capable of supporting the methodologies of the present invention presented in detail below.

B. Basic system software

Illustrated in Fig. 2, a computer software system 200 is provided for directing the operation of the computer system 100. Software system 200, which is stored in system memory (RAM) 102 and on fixed storage (e.g., hard disk) 116, includes a kernel or operating system (OS) 210. The OS 210 manages low-level aspects of computer operation, including managing execution of processes, memory allocation, file input and output (I/O), and device I/O. One or more application programs, such as client application software or “programs” 201 (e.g., 201a, 201b, 201c, 201d) may be “loaded” (i.e., transferred from fixed storage 116 into memory 102) for execution by the system 100. For example, when the computer system 100 is used for a desktop client device, application software 201b may include a software 205 capable of viewing or otherwise processing digital image files, such as a Web (HTML) browser.

System 200 includes a graphical user interface (GUI) 215, for receiving user commands and data in a graphical (e.g., “point-and-click”) fashion. These inputs, in turn, may be acted upon by the system 100 in accordance with instructions from operating system 210, and/or client application module(s) 201. The GUI 215 also serves to display the results of operation from the OS 210 and application(s) 201, whereupon the user may supply additional inputs or terminate the session. Typically, the OS 210 operates in conjunction with device drivers 220 (e.g., “Winsock” driver) and the system BIOS microcode 230 (i.e., ROM-based microcode), particularly when interfacing with peripheral devices. OS 210 can be provided by a conventional operating system, such as Microsoft® Windows 9x, Microsoft® Windows NT, or Microsoft® Windows 2000, all available from Microsoft Corporation of Redmond, WA. Alternatively, OS 210 can also be an alternative operating system, such as the previously-mentioned operating systems.

The above-described system 100 is presented for purposes of illustrating the basic hardware underlying desktop and server computer components that may be employed in the system of the present invention. For purposes of discussion, the following description will present examples in which it will be assumed that there exists a “server” or similar device connected to clients, which maintains photographic information of interest to the

ultimate end user. The present invention, however, is not limited to any particular environment or device configuration. In particular, a server distinction is not necessary to the invention, but is used to provide a framework for discussion. Instead, the present invention may be implemented in any type of computer system or processing environment capable of supporting the methodologies of the present invention presented in detail below.

Improved online access to photographic images and attributes

A. General design considerations

Today, it is easy for a given user to make a set of his or her photographs available on the Web. For instance, the user may have an account at a photographic sharing site, whereupon the user places his or her photographs on a server connected to the Internet. At the same time, various target devices exist that are capable of displaying photographs. Therefore, the specific problem addressed may be summarized as follows: given the various target devices available and given a set of photos available in a particular format via the Internet, how does one translate those photographs in a manner suitable for viewing by the target devices, so that when the photographs are transmitted to a particular target device they may be perceived by users in a satisfactory manner.

Multiple issues exist in regards to getting the preferences of a particular target device. For instance, some of the devices can publish their capabilities, while others cannot. For those devices that can publish their capabilities, a mechanism is required that can identify those capabilities, on a per-request basis, and generate appropriate data automatically and on-the-fly. In some cases, the capabilities of the device are known beforehand, for instance, based on the identity of the target device itself. This may be achieved, for example, by including a knowledgebase that includes information about popular devices. However, knowing a particular target device's capabilities itself is not enough. Given a target device with multiple capabilities, the user himself or herself may express a particular preference for use of a particular capability of the target device. In such a case, the user of the target device may set various preferences for that device. That preference information itself may or may not be available, on demand, at the server.

Once the preferences are determined and given a particular set of photographs, the system includes intelligence that allows it to optimally translate the photographs (from their original format) into a format suitable for use by the particular target device. Although the actual translation of an image from one format to another may be performed using off-the-shelf techniques, the overall translation or transformation process must be performed in a manner that preserves performance and scalability criteria desired for the system.

An important consideration for this process is the underlying transport speed available for transmitting an image to a particular target device. Consider, for instance, a very intelligent device that supports complete color display. If that device is connected over a 9600 baud connection, however, the server should not transmit the entire, full color (e.g., 32-bit depth) image for display at that device. Accordingly, the system should take into account the capability of the transport that is currently available for sending photographic images to the target device. In the currently-preferred embodiment, the capability of the transport (i.e., dynamically-available bandwidth) for a given target device is treated as one of the capabilities of that target device.

B. High-level description of Photographic Server system

Figs. 3A-B illustrate an online photographic environment 300 of the present invention for delivering photographic images to any device with connectivity capability. As shown in Fig. 3A, the environment 300 includes connectivity to a variety of target devices ("clients"); each of the devices is capable of connecting over the Internet (shown at 303) to a Photographic Server System (PhotoServer) 350, for accessing online photo albums 361 according to user and device profiles (at 363 and 365, respectively). For example, the target devices include both wireless devices 310 (e.g., cellular phone, handheld PDA (personal data assistant), and pager) as well as wireline devices 320 (e.g., desktop computer and videophone).

The architecture of the PhotoServer 350 is shown in greater detail in Fig. 3B. As illustrated, the PhotoServer 350 includes the following modules: a Photographic Server (i.e., the core "photo server") 351, a User Data Manager 353, a Device Profile Manager 355,

a Photo Translator 357, a Photo Cache 359, and a Photo Storage (module) 360. The Photographic Server 351 is responsible for serving up the photos based on the target device display capabilities. The display capabilities are communicated to the Photographic Server 351 by the device or the person who owns or controls the device, or are surmised by the system. If the device is communicating its capabilities, it does so during the initiation or during every interaction; alternatively, its capabilities are hard-coded into the Photographic Server 351 based on the prior knowledge of the device. The owner of the device can fine-tune the settings based on the actual settings of the device (such as resolution, preferred method of translation, and the like). The Photographic Server 351, which works independently of the available transport mechanisms (e.g., wireless or wireline), interacts with all the other modules to translate a requested photo into an appropriate target format.

The other modules function as follows. The User Data Manager 353 manages all the user information, user preferences, and the device types owned by the users. It also lists all the optional preference settings for those devices that support preference settings. The Device Profile Manager 355 manages all the known devices (that the system supports), their capabilities, available transport mechanisms, and optional preferences. Every time a new device is encountered, its profile is entered into the Device Profile Manager 355. The PhotoServer 351 consults the Device Profile Manager 355 before translating the photos. The Photo Translator 357 translates the photo from one format (e.g., JPEG) to another (e.g., GIF) based on the parameters sent. In effect, this module is a wrapper around various internal translation methodologies embodied in the system.

The Photo Storage 360 provides a complete photo storage subsystem. This is where all photos are stored, each being identifiable by a unique identifier (photo ID). In the preferred embodiment, the Photo Storage 360 is implemented as a storage area network supporting massive data storage, on the order of terabytes. Each digital photograph is stored as an individual file, using the UNIX file system. Metadata for each photograph, on the other hand, is stored in a relational database table of a relational database system, thereby supporting querying of the information. Suitable relational database systems are available

from numerous vendors, including Oracle Corporation of Redwood Shores, California, and Sybase, Inc. of Emeryville, California.

Fig. 3C illustrates an exemplary storage structure. User data is kept in a separate table, User Info Table 371, which is controlled by the User Data Manager 353. As shown, each user is associated with a user ID that uniquely identifies that particular user. Similarly, each photograph is associated with a photo ID that uniquely identifies that particular photograph. A unique ID may be created in a conventional manner, such as creating one from an auto-incrementing counter, such as a 128-bit counter, or from a system timestamp; in the currently-preferred embodiment, a 128-bit counter is employed. Every user “owns” a set of photos. Information about which photos belong to which users is itself stored in a separate table, a Photo Ownership Table 373. The table identifies who (by user ID) owns which photographs (by photo ID). This table, in turn, references a Photo Info Table 375 where information about individual photographs is stored. The Photo Info Table 375, which is keyed by photo ID (i.e., primary key), stores metadata about each photo as well as information about where the photograph itself (image data) is stored by the UNIX File System 377. The metadata itself includes a title, description, size of the photo, resolution of the photo, where originally created, and how it was uploaded to the system (including, for instance, information about the target device’s own photo ID, if any). Both a photograph and its corresponding metadata may be streamed out to a target device on demand, per the methodology described below.

Supporting of the Photo Storage 360 is the Photo Cache 359. This is a disk-based, system-wide cache of translated photos, based on parameters supplied to the Photo Translator 357. The Photo Cache can grow or shrink, based on the size set by the system administrator. Previously-translated photos are kept in this cache. This cache is searched first for the availability of the photo and if a translated photo is available, then the photo is returned from the cache itself.

C. Detailed operation

1. Overview

In accordance with the present invention, the PhotoServer 350 embodies a method that provides access to photographic images and attributes, including annotations (e.g., text or voice annotations) for multiple disparate client devices. The method is invoked in response to a request from any target device for a photograph(s) and/or information about that photograph(s).

2. High-level operation

Fig. 4A illustrates the high-level steps involved in the overall method 400. As indicated by step 401, the method 400 processes the received input request based on a user identifier (user ID) or a photograph identifier (photo ID) for the photos that are of interest. The photo ID is a unique identifier for a particular photograph that either (1) has been created by the system and has been previously communicated to the target device (client), or (2) has been created by the target device (i.e., it is the target device's unique identifier), in the case where the target device is connecting for the first time. At step 402, the method constructs an information record describing the target device's capabilities. Information gathered from this step allows the PhotoServer 350 to understand exactly what capabilities it can support in the target device. In particular, this information indicates to the system what particular translation or transformation operation(s) is required for translating the original photo into a format suitable for the target device.

Now, the method is ready to check in the Photo Cache 359 to see if the cache already stores the photo of interest -- that is, stores a version of the photo that has been translated in a manner suitable for this particular target device. This step is indicated at step 403. If the photo (translated for the target device) already exists in the Photo Cache, tested at step 404, the method may simply return that to the target device, as indicated by the jump to step 407. However, if it is not in the cache (i.e., "False" at step 404), then the method proceeds to step 405. At step 405, the photo ID and the target device parameters are passed on to the Photo Translator 357. The task of the Photo Translator, at this point, is to transform

the photo from its original format into the format that is desired for the target device (based on target device capabilities). Once the Photo Translator has carried out this task, the newly-transformed version of the photo is copied into the Photo Cache, as shown at step 406, and that translated version of the photo is returned to the target device, as indicated by step 407, in a streaming fashion.

3. Constructing a target device's capabilities

Fig. 4B illustrates the high-level step 402 in further detail, as subroutine steps 421-426. At the outset, at step 421, an input request is received, either over wireless or wireline transport. The request itself is transmitted using a communication protocol, such as a request using HTTP (Hypertext Transport Protocol) or WAP (Wireless Application Protocol). As indicated by step 422, information about the target device's capabilities may be sent as part of the input request. Based on the target device's capabilities, a session ID, a user ID, and/or a photo ID may also accompany the request for photos. For an HTTP browser at the target device, for example, only a session ID accompanies the request sent to the PhotoServer. In that case, the session ID is employed to determine who the user is (user ID) and what photos that user has on the PhotoServer. For a WAP browser at the target device, in contrast, far more information may be provided, including the user ID and the actual photo ID. At the low end of the scale, a simple handheld device may not have any capability to store state information, in which case the request does not include additional information.

Additionally, the capabilities of the target device itself are sent as part of the request (MIME types) or, alternatively, just device-class information is sent, as indicated by step 423. For example, an HTTP browser may indicate the browser name (e.g., "Netscape Navigator" or "Microsoft Internet Explorer"), the browser version, and the graphic types it supports. This information is helpful in instances where graphic support is limited, such as a browser running on a set-top box having very limited graphic support (e.g., JPEG support only). In the case that the target device is not able to indicate its capabilities, it will at least indicate its device class, such as a Palm handheld device, a set-top box, a phone with a WAP browser, or the like. In case device class information is sent, this information is used to get

appropriate parameters from the Device Profile Manager, as indicated by step 424. Based on the device class, the Device Profile Manager will return information about what that device's capabilities are. For example, the device class may be a Palm handheld device of a particular model. Based on that, the Device Profile Manager may discern, based on its knowledgebase, the capabilities of the device, such as display capability (e.g., 16-color), device memory (e.g., 4-8 MB), display size (e.g., 3" x 5"), and a 56K modem. If only user information is sent (i.e., photo IDs are not transmitted as part of the request), then the method determines a list of photo IDs belonging to the user by using the User Data Manager 353, as indicated by step 425. Now, the method has identified a list of photo IDs (one or more photos), display resolution and physical size, color capability, and recommended photo format for the target device, as indicated by step 426.

Although not shown as a specific step above, the underlying communication transport may be inferred from the class or type of device. For example, if the target device is a cellular phone, the system may infer that the underlying communication transport is wireless. As another example, if the target device is a pager that is communicating using WAP, the system may infer that the target device uses wireless communication with limited bandwidth (as compared to a cellular phone). Based on the device class and the incoming request, the system may usually discern whether the communication transport is wireless or wireline. Moreover, very few devices have both wireless and wireline capability. Typical wireline connections include T1, DSL, cable modem and dial-up connections. On the wireless side, typical connections include 9600 baud circuit-switched data call, 9600 baud packet-switched data call, or the newer 64K baud GPR call.

4. Photo Cache processing

Fig. 4C illustrates the high-level step 403 in further detail, as subroutine steps 431-435. Based on the data from step 426, the Photo Cache is searched at step 431 to see whether a previously-computed photo exists. In other words, has this same translation operation been performed previously on exactly the same photo for the same device (or a device requiring the same translation), and that translated photo still remains in the cache. In

the currently-preferred embodiment, each cache entry is identified by hashing first on the photo ID (e.g., long integer) and then on the device type (e.g., text string) at a particular device resolution (e.g., text string), as indicated by step 432. In the case of a cache hit (i.e., the hash value resolves to a temporary filename for the cached photo), tested at step 433, the return value for the subroutine is set to "True", as indicated at step 434. Otherwise, the return value is set to "False", as indicated at step 435. Thereafter, the subroutine may return.

5. Photo Translator processing

Fig. 4D illustrates the high-level step 405 in further detail, as subroutine steps 451-453. If there is a miss in the cache, then the desired photo must be translated. Therefore, at step 451, the photo ID is passed to the Photo Storage (module) 360 to retrieve the full resolution version of the photo. The retrieved photo and target display details are passed on to Photo Translator, at step 452. The Photo Translator carries out any necessary translation, by invoking the device-independent rendering described below. Finally, the Photo Translator returns the photo in an appropriate binary format for the specific target device, at step 453. Thereafter, the subroutine may return.

During its operation, the Photo Translator implements "device-independent rendering." Here, the image data is first converted into an intermediate format that is device independent. Thereafter, device dependent routines convert the intermediate format to an appropriate device format for the target device. The Photo Translator receives as input the following:

- Photo in Klikpix or JPEG format;
- Dimensions of output (width and height);
- Type of output device;
- Color space (e.g., RGB or Grayscale);
- Color palette (e.g., True color or indexed); and
- Compression technique.

From these inputs, the Photo Translator may output a picture in the specified output format at the specified size. Note that some devices may be characterized differently than their native

characteristics. For example a device with a 16-color LCD display may prefer to be characterized as a true-color device. It is then the responsibility of the device to convert the true-color mode image transmitted by the PhotoServer to its internal 16-color mode using internal software/hardware. The compression scheme could be proprietary or an industry standard like JPEG, JBIG, GIF, or the like. See, e.g., *JPEG-like Image Compression* (Parts 1 and 2), Dr. Dobb's Journal, July 1995 and August 1995 respectively (available on CD ROM as *Dr. Dobb's/CD Release 6* from Dr. Dobb's Journal of San Mateo, CA). The disclosure of the foregoing is hereby incorporated by reference.

The specific operation of the Photo Translator is as follows. First, the input picture is decompressed to generate a bitmap in the color space that was employed. For example, Klikpix uses GUV color space; JPEG supports multiple color space, including YUV and RGB. GUV color space is described in commonly-owned application serial number 09/489,511, filed January 21, 2000, the disclosure of which is hereby incorporated by reference; a description of industry-standard color spaces may also be found in that application. The picture is then converted to a "standard" intermediate format, typically in one of the industry-standard color spaces. Examples include:

L,a,b 16bits/pixel/channel (e.g., used in Adobe Photoshop);
 SRGB 8bits/pixel/channel (e.g., used by Microsoft, HP, and others); and
 YUV

The intermediate format is then mapped to the format required by the output device with the following processing:

1. Image scaling - to scale the image to the desired output size.
2. If only monochrome information is desired, then a monochrome version of the image is generated using standard conversion methods (e.g., using International Telecommunication Union (ITU) recommendations for generating luminance signal Y from R,G,B signals, see, e.g.: ITU-Recommendation BT.601-1 "Encoding parameters of Digital Television for studio").
3. If the bits/pixel is fewer than 8 - then dithering techniques (such as error diffusion, blue noise masking, or the like - see, e.g., "Recent Progress in Digital Halftoning", 1994, The

Society of Imaging Science and Technology, compiled and edited by Reiner Eschbach, ISBN 0-892080-181-3).

4. If the output device has a color palette (e.g., supporting only 256 colors) then color dithering schemes are used. Such schemes are discussed in some detail in “Computer Graphics-Principles and Practice”, Second Edition, 1990, Foley, van Dam, et al., Addison-Wesley, Reading, MA, ISBN 0-201-12110-7.

5. Compression is optionally performed before data is streamed out. For true-color images, the preferred compression scheme is JPEG. For indexed images GIF, PNG are the preferred methods. For halftoned images, the preferred approach would be JBIG compression.

(The disclosures of the above-mentioned references are hereby incorporated by reference.)

Finally, the generated picture is outputted, and is ready for streaming to a target device for ultimate rendering on that device’s display.

D. Photo annotations

In addition to photo attributes (e.g., size, color depth, and so forth), metadata also includes user-supplied annotations. When users arrive online to view photos, they often wish to view the annotations associated with those photos. Annotations include, for instance, text or voice descriptions created by various users, including the owner of the photo or those users whom the owner shares the photos with.

Just as target devices have varying levels of capability for displaying photos, those devices also have varying levels of capability for rendering the annotations. Many potential target devices may not include the capability to display both the image and the accompanying annotations on the same screen, thus necessitating use of, for instance, “next” and “previous” screens. Other devices, on the other hand, may include advanced capabilities for displaying images and annotations simultaneously on the same screen. Because each device class’ capabilities are tracked, the system knows exactly what is the capability of a particular target device. Therefore, in accordance with the present invention, the system is able to dynamically (i.e., on-the-fly) format the annotations in a manner that is appropriate for the particular target device. If needed, for example, the system may format annotations into multiple pages, as appropriate for the target device. Or, if voice annotations exist for a photo,

and the target device supports voice data, those annotations may be streamed to the target device. Thus as was the case with the image data, the system of the present invention may format or translate the annotations of a photo in a manner suitable for the target or destination device.

5

While the invention is described in some detail with specific reference to a single-preferred embodiment and certain alternatives, there is no intent to limit the invention to that particular embodiment or those specific alternatives. For instance, those skilled in the art will appreciate that modifications may be made to the preferred embodiment without departing from the teachings of the present invention.

10

11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204

WHAT IS CLAIMED IS:

1. In an online system, a method for providing digital photographic images to target devices, the method comprising:

5 receiving a request to provide a target device with a copy of a particular photographic image;

determining capabilities of the target device;

based on the capabilities of the target device, determining a format that is desired for providing the target device with a copy of the particular photographic image;

10 determining whether a cached copy of the particular photographic image already exists in said determined format;

if a cached copy exists, providing the target device with the cached copy of the particular photographic image and thereafter terminating the method;

15 if a cached copy does not exist, translating the particular photographic image into a copy having said determined format; and

providing the target device with the copy having said determined format.

2. The method of claim 1, further comprising:

storing the copy having said determined format in a cache memory.

3. The method of claim 2, further comprising:

receiving from the target device a subsequent request for the particular photographic image; and

providing the target device with the copy stored in said cache memory.

25 4. The method of claim 1, wherein said request specifies a photographic identifier (photo ID).

5. The method of claim 4, wherein said photo ID comprises a unique ID created by said online system for identifying photographic images.

6. The method of claim 4, wherein said photo ID comprises a 128-bit value.

7. The method of claim 4, wherein said photo ID is created from an auto-incrementing counter.

8. The method of claim 4, wherein said photo ID is created from a system timestamp.

9. The method of claim 1, wherein said request specifies a user identifier (user ID).

10. The method of claim 9, wherein said user ID comprises a unique ID created by said online system for identifying users.

11. The method of claim 1, wherein the capabilities of the target device include screen resolution.

12. The method of claim 1, wherein the capabilities of the target device include screen size.

13. The method of claim 1, wherein the capabilities of the target device include color support.

14. The method of claim 1, wherein the capabilities of the target device include currently-available communication medium that the target device employs to transmit its request.

15. The method of claim 14, wherein currently-available communication medium comprises wireless communication.

16. The method of claim 14, wherein currently-available communication medium comprises wireline communication.

17. The method of claim 1, wherein said step of determining capabilities of the target device includes:
querying the device for its capabilities.

18. The method of claim 1, wherein said step of determining capabilities of the target device includes:
determining capabilities from a knowledgebase, based on a device class for the target device.

19. The method of claim 1, wherein said step of determining a format that is desired includes:
determining an appropriate resolution for rendering the particular photographic image at the target device.

20. The method of claim 1, wherein said step of determining a format that is desired includes:
determining an appropriate color space for rendering the particular photographic image at the target device.

21. The method of claim 1, wherein said step of determining a format that is desired includes:
determining an appropriate image size for rendering the particular photographic image at the target device.

22. The method of claim 1, wherein said step of determining a format that is desired includes:

determining communication bandwidth available for transmitting a copy of the particular photographic image to the target device.

23. The method of claim 22, wherein the communication bandwidth available is determined, at least in part, based on a device class for the target device.

24. The method of claim 1, wherein said target device includes a handheld computing device having display capability.

25. The method of claim 1, wherein said target device includes a cellular phone device having display capability.

26. The method of claim 1, wherein said target device includes a pager device having display capability.

27. The method of claim 1, wherein said target device includes a personal computer having display capability.

28. The method of claim 1, wherein said target device includes WAP (Wireless Application Protocol) support.

29. The method of claim 1, wherein said step of determining a format that is desired includes determining user preferences, if any, for rendering images at the target device.

30. The method of claim 1, wherein said request specifies a photographic identifier (photo ID), and wherein said step of determining whether a cached copy of the

particular photographic image already exists is determined, at least in part, based on the photo ID for the particular photographic image.

31. The method of claim 1, further comprising:

based on the capabilities of the target device, determining metadata for the particular photographic image that may be provided to the target device.

32. The method of claim 31, wherein said metadata includes attribute information for the particular photographic image.

33. The method of claim 32, wherein said metadata includes annotations for the particular photographic image.

34. The method of claim 33, wherein said annotations include text data.

35. The method of claim 33, wherein said annotations include voice data.

36. An online photographic server system for providing digital photographic images to target devices, the system comprising:

a storage module for storing digital photographic images for sharing among users; and

a photographic server:

for processing a request to provide a target device with a copy of a particular photographic image;

for automatically determining capabilities of the target device; and

for providing the target device with a copy of the particular photographic image, said copy being automatically translated into a particular format based on the capabilities of the target device.

37. The system of claim 36, further comprising:

a cache memory for storing copies of photographic images that have been translated.

38. The system of claim 37, wherein said photographic server first attempts to satisfy the request by retrieving a copy of the particular photographic image having the particular format from the cache memory.

39. The system of claim 36, wherein each digital photographic image stored by said storage module is associated with a photographic identifier (photo ID).

40. The system of claim 39, wherein said request includes the photo ID for said particular photographic image.

41. The system of claim 40, wherein said photo ID is created from an auto-incrementing counter.

42. The system of claim 36, wherein said request specifies a user identifier (user ID), and wherein said system stores information associating each user with one or more particular digital photographic images.

43. The system of claim 36, wherein the capabilities of the target device include screen resolution.

44. The system of claim 36, wherein the capabilities of the target device include screen size.

45. The system of claim 36, wherein the capabilities of the target device include color support.

46. The system of claim 36, wherein the capabilities of the target device include currently-available communication medium that the target device employs to transmit its request.

5 47. The system of claim 36, wherein currently-available communication medium comprises wireless communication.

48. The system of claim 36, wherein currently-available communication medium comprises wireline communication.

10 49. The system of claim 36, wherein said photographic server includes the ability to query the target device for its capabilities.

15 50. The system of claim 36, wherein said photographic server includes a knowledgebase for determining the capabilities of the target device.

20 51. The system of claim 36, wherein said particular format is selected based on an appropriate resolution for rendering the particular photographic image at the target device.

52. The system of claim 36, wherein said particular format is selected based on an appropriate color space for rendering the particular photographic image at the target device.

25 53. The system of claim 36, wherein said particular format is selected based on an appropriate image size for rendering the particular photographic image at the target device.

54. The system of claim 36, wherein said particular format is selected based on communication bandwidth available for transmitting a copy of the particular photographic image to the target device.

5 55. The system of claim 54, wherein the communication bandwidth available is determined, at least in part, based on a device class for the target device.

56. The system of claim 36, wherein said target device includes a handheld computing device having display capability.

10 57. The system of claim 36, wherein said target device includes a cellular phone device having display capability.

15 58. The system of claim 36, wherein said target device includes a pager device having display capability.

59. The system of claim 36, wherein said target device includes a personal computer having display capability.

20 60. The system of claim 36, wherein said target device includes WAP (Wireless Application Protocol) support.

61. The system of claim 36, wherein said particular format is selected, at least in part, based on user preferences, if any, for rendering images at the target device.

25 62. The system of claim 36, wherein the storage system stores metadata for each of the digital photographic images, and wherein the photographic server is capable of determining metadata for the particular photographic image that may be provided to the target device.

63. The system of claim 62, wherein said metadata includes attribute information for the particular photographic image.

64. The system of claim 62, wherein said metadata includes annotations for the particular photographic image.

65. The system of claim 64, wherein said annotations include text data.

66. The system of claim 64, wherein said annotations include voice data.

SYSTEM AND METHODOLOGY PROVIDING ACCESS TO PHOTOGRAPHIC
IMAGES AND ATTRIBUTES FOR MULTIPLE DISPARATE CLIENT DEVICES

ABSTRACT OF THE DISCLOSURE

5 A Photographic Server ("PhotoServer") System is described that implements a methodology for providing access to photographic images and attributes for multiple disparate client devices. The PhotoServer includes a Photographic Server (i.e., the core "photo server"), a User Data Manager, a Device Profile Manager, a Photo Translator, a Photo Cache, and a Photo Storage (module). The method for providing access to photographic
10 images and attributes operates as follows. First, the method processes the received input request based on a user identifier (user ID) or a photograph identifier (photo ID) for the photos that are of interest. Next, the method constructs an information record describing the target device's capabilities. Information gathered from this step allows the PhotoServer system to understand exactly what capabilities it can support in the target device. In particular, this information indicates to the system what transformation (if any) is required for translating the original photo into a format suitable for the target device. Now, the method checks the Photo Cache to see if it stores the photo of interest. If the photo (translated for the target device) already exists in the Photo Cache, the method may simply return that to the target device. However, if it is not in the cache, then the method passes the photo ID and the target device parameters on to the Photo Translator, which transforms the photo from its original format into the format that is desired for the target device (based on target device capabilities). Once the Photo Translator has carried out this task, the newly-transformed version of the photo is copied into the Photo Cache (e.g., for possible future use). This translated version of the photo is now returned to the target device, in a streaming fashion.

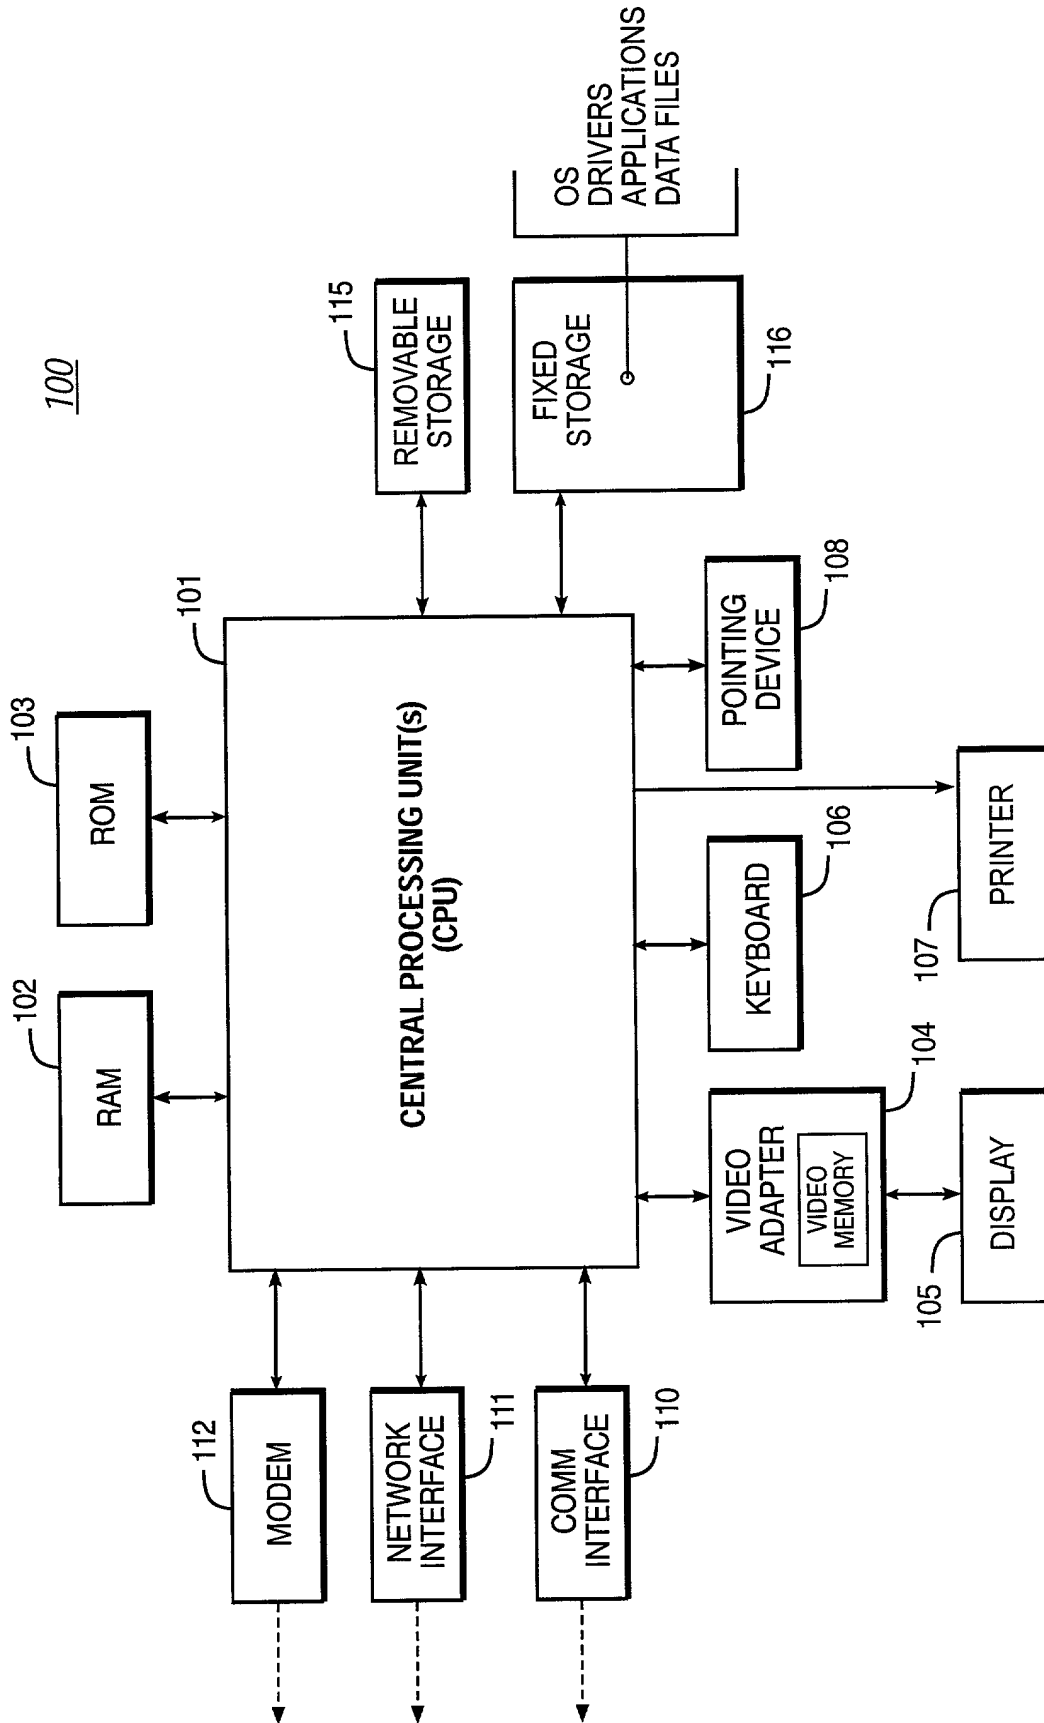


FIG. 1
(PRIOR ART)

200

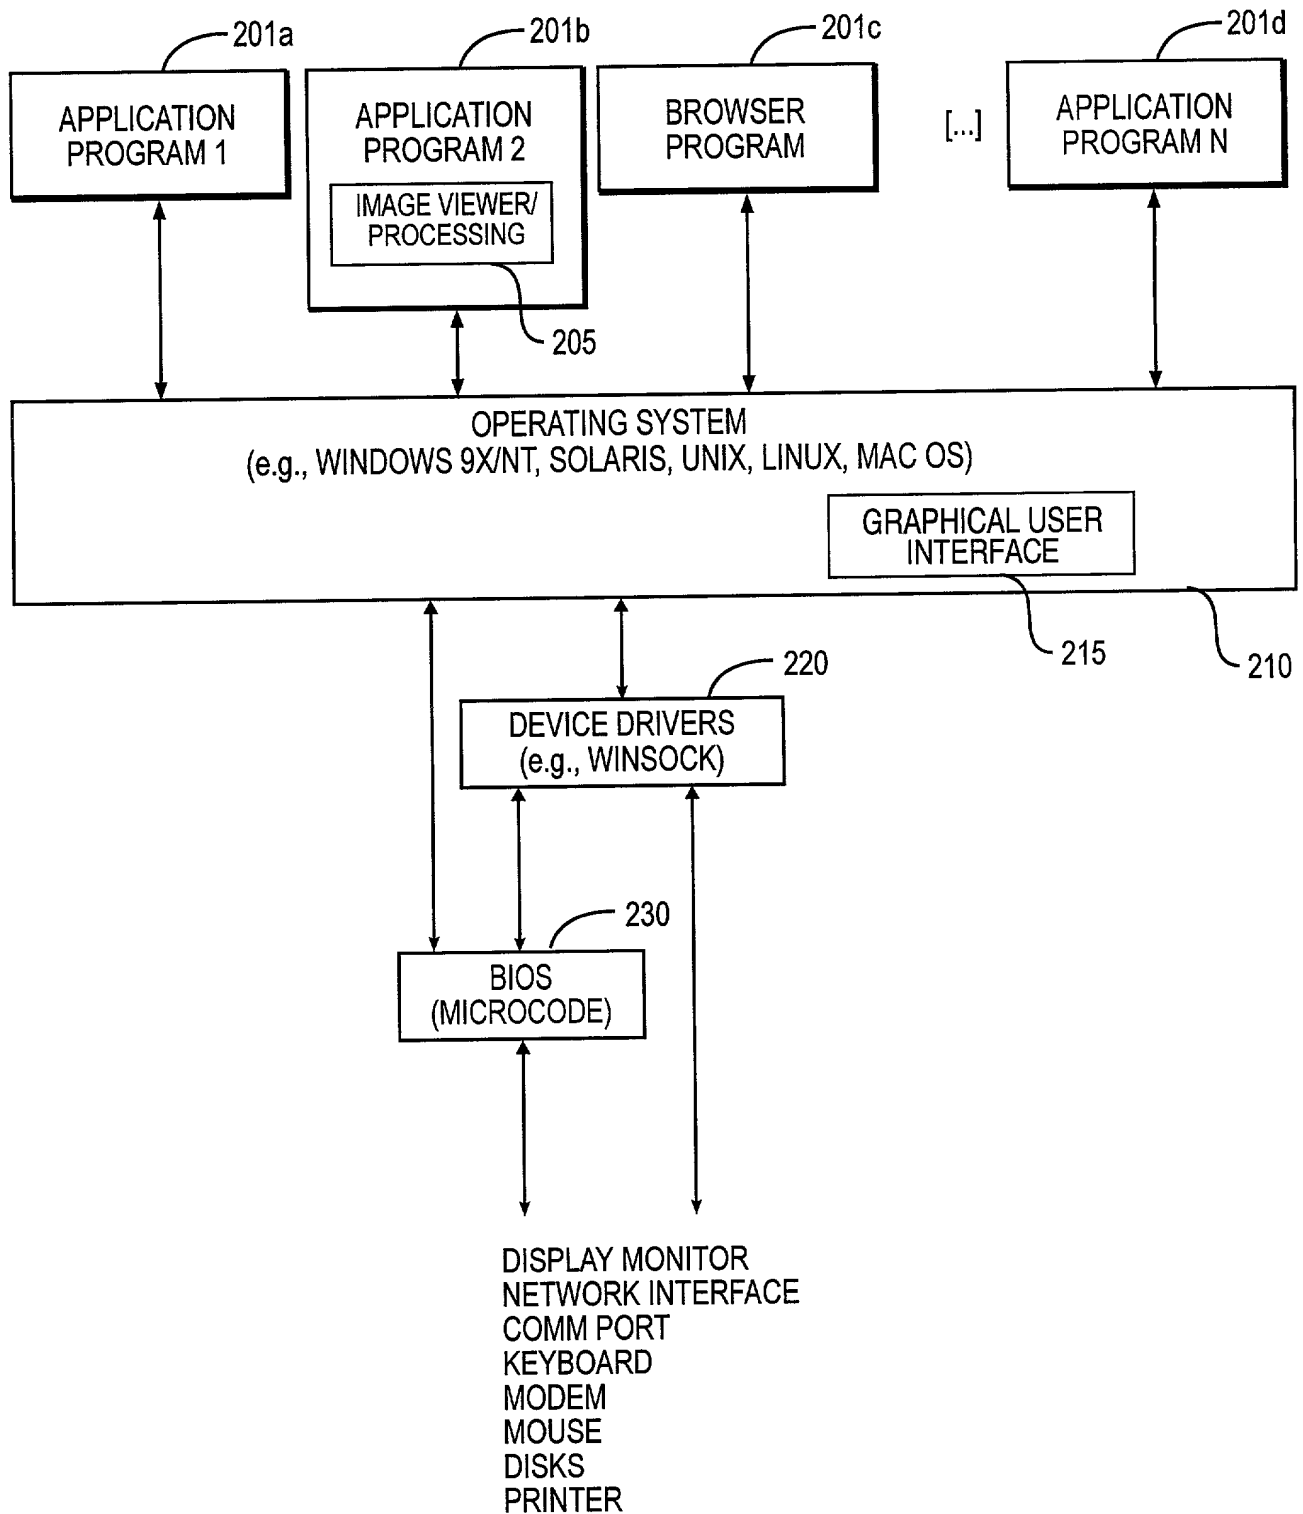


FIG. 2

300

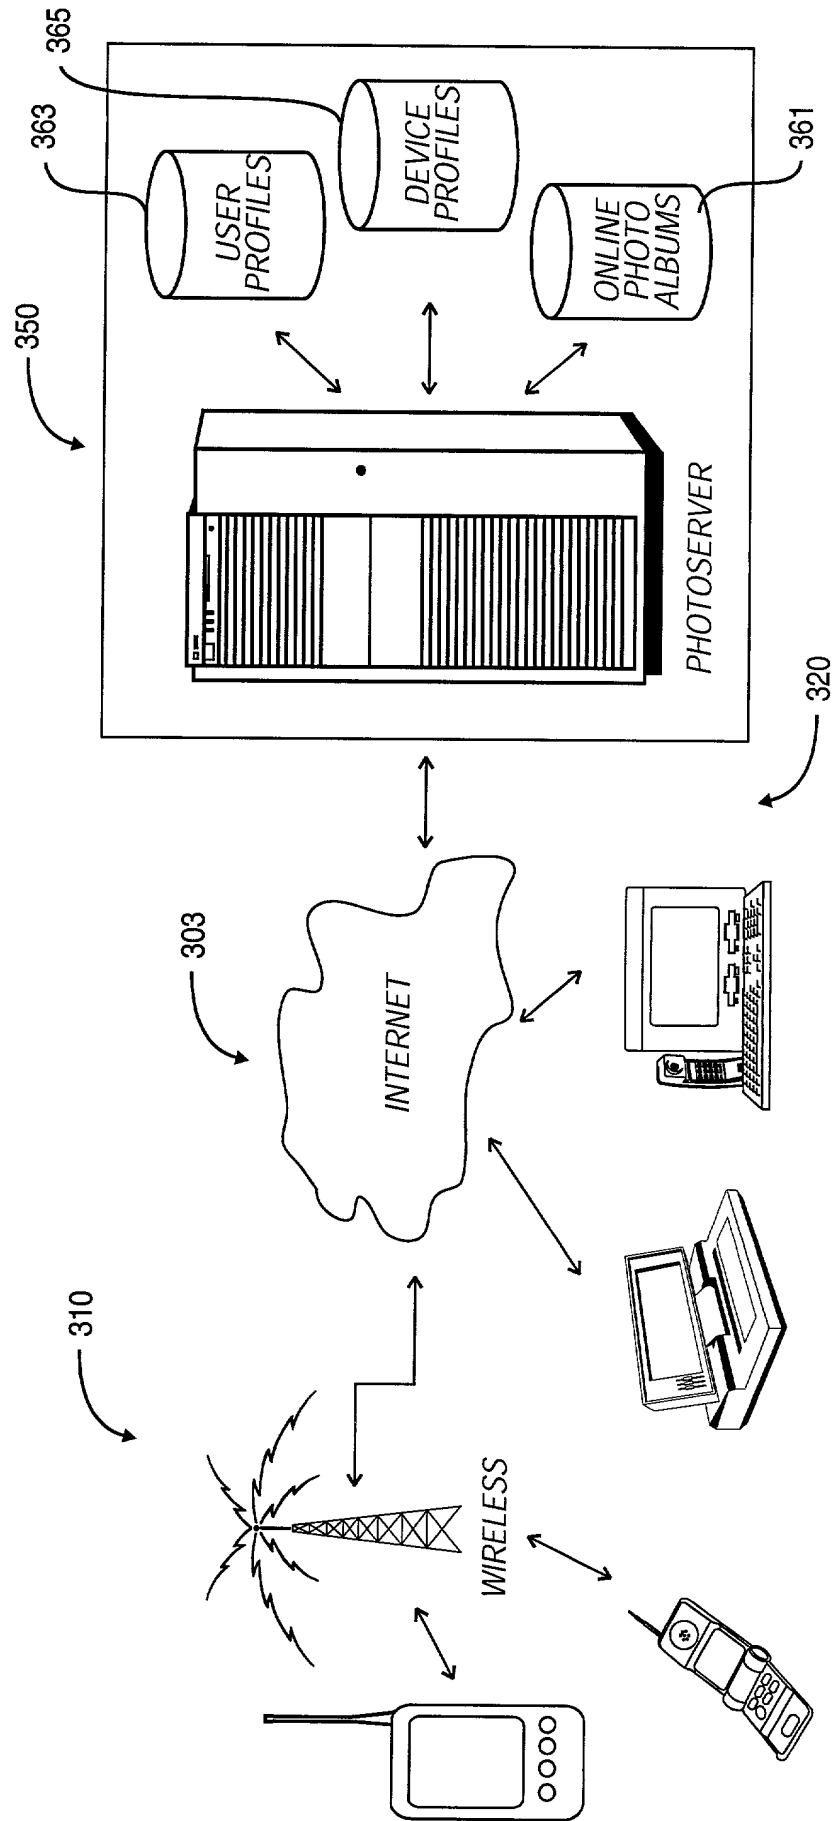


FIG. 3A

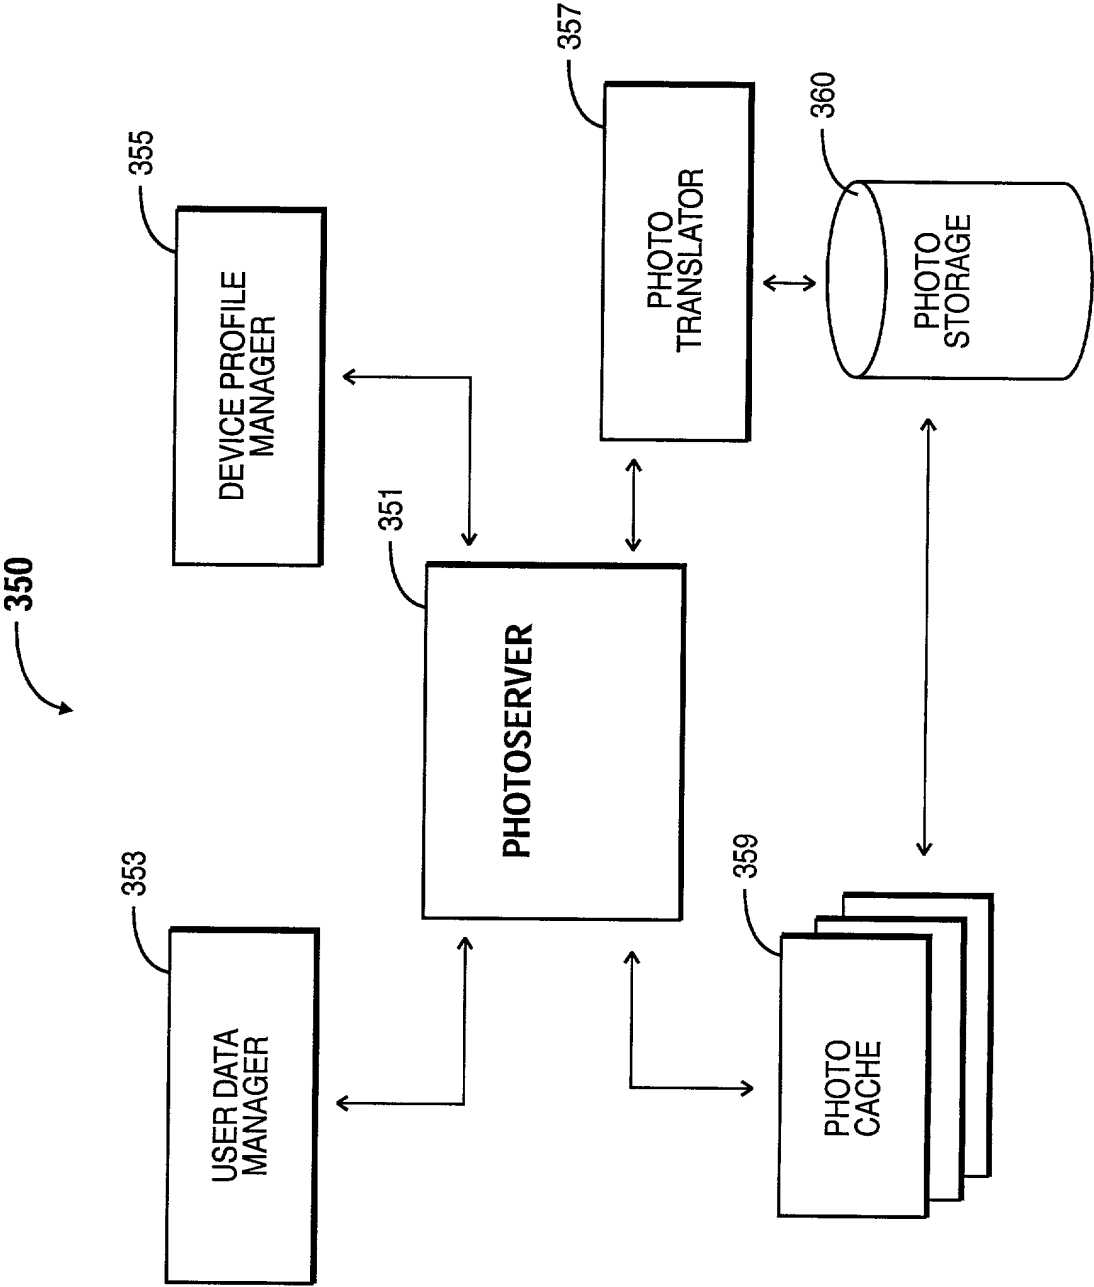


FIG. 3B

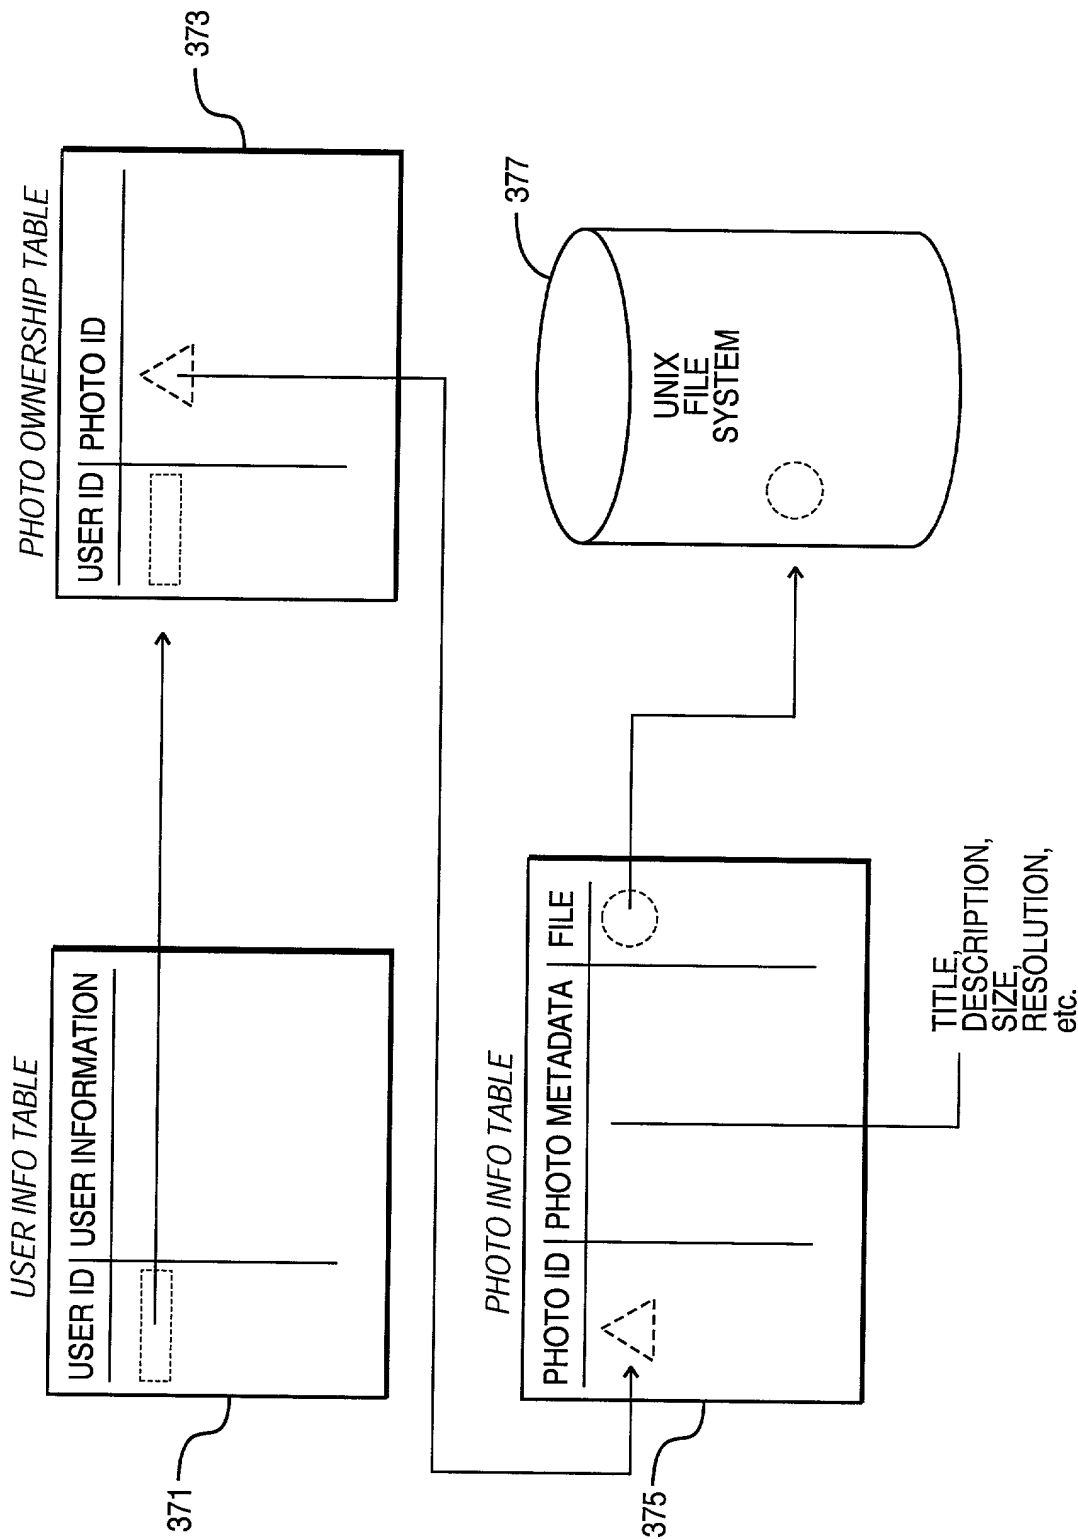


FIG. 3C

400

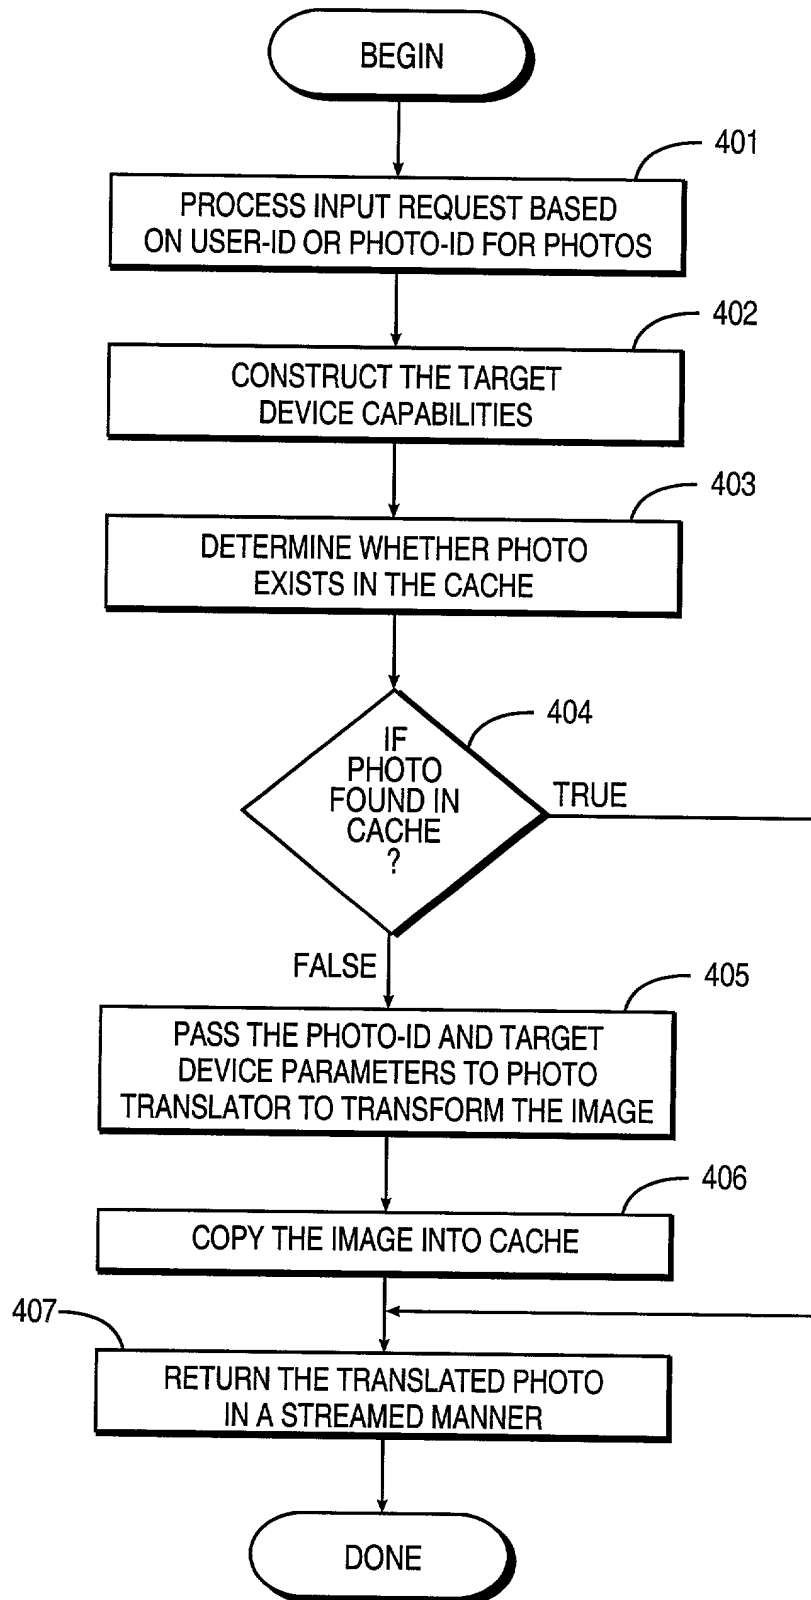


FIG. 4A

402

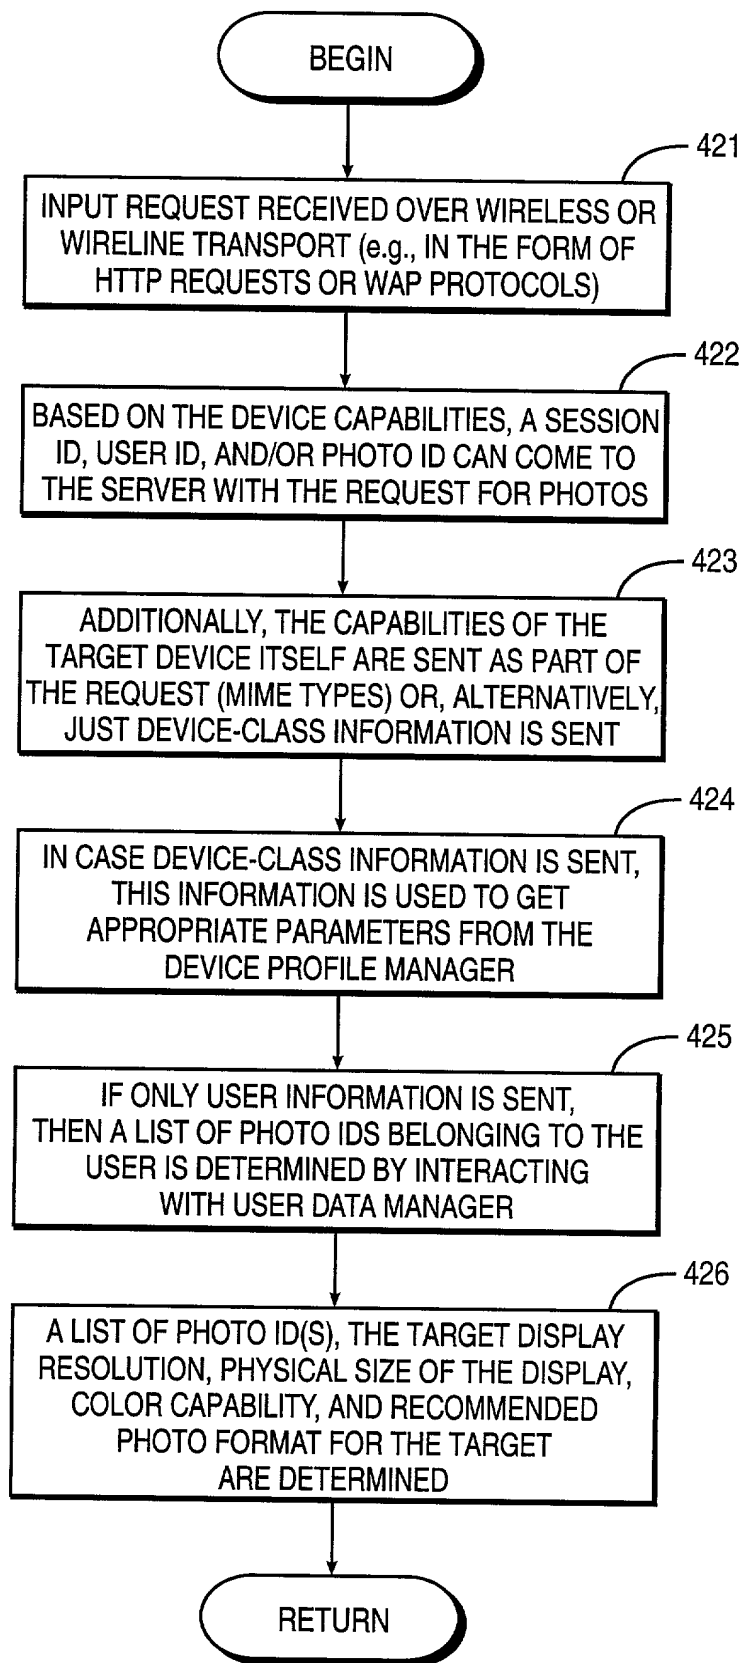


FIG. 4B

403

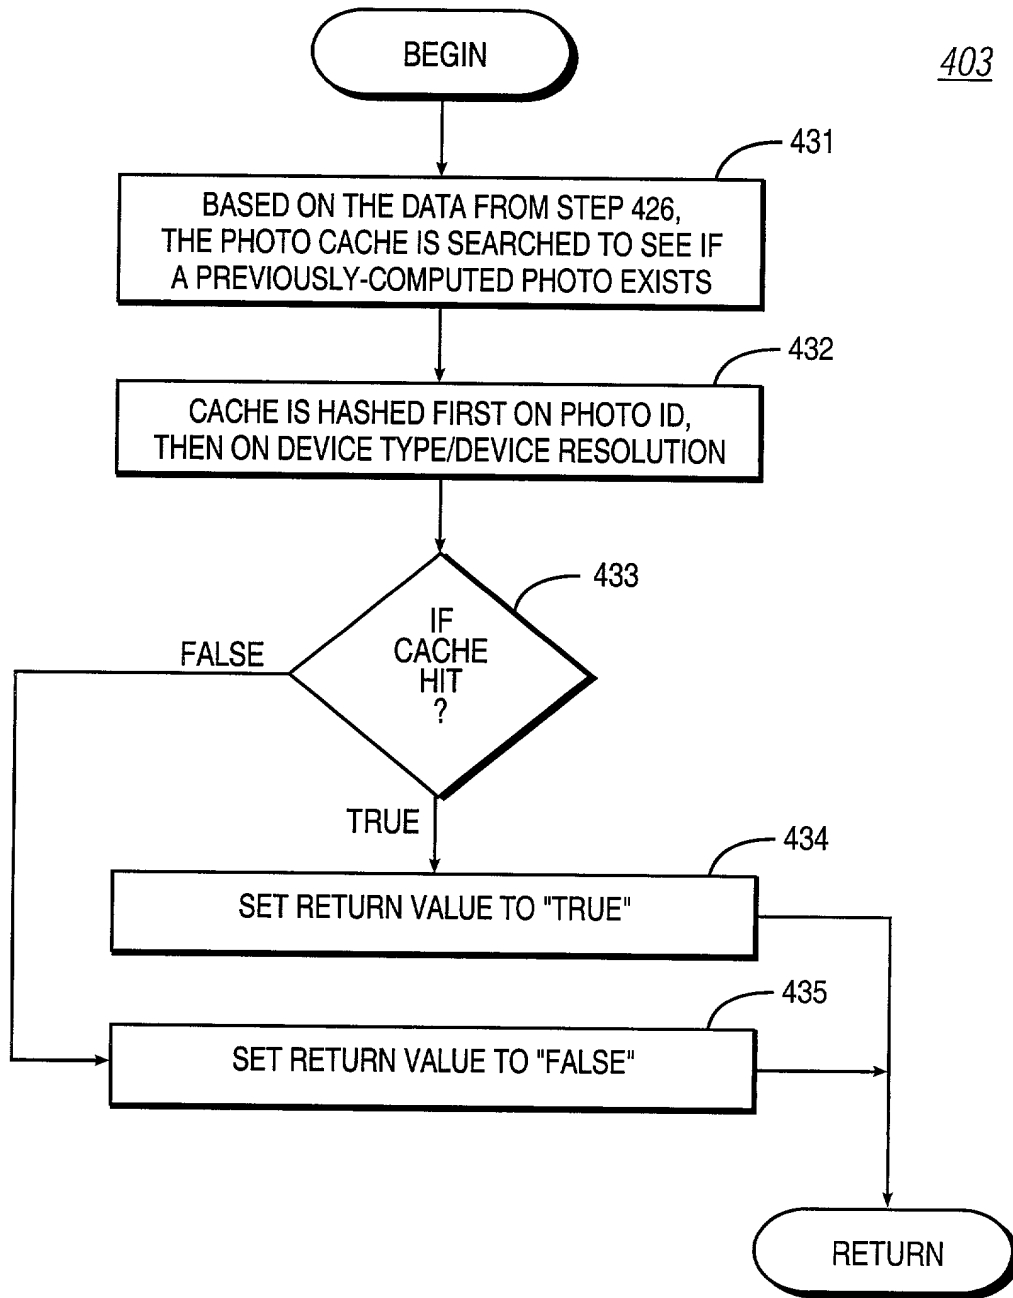


FIG. 4C

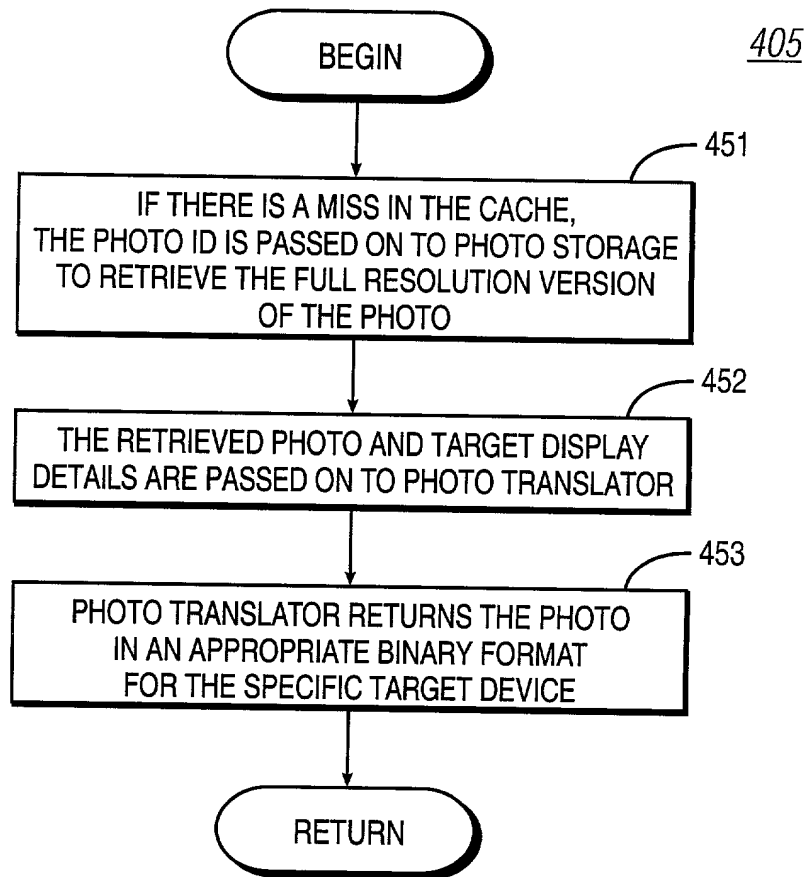


FIG. 4D